

L230 Multiport 3 Way Full Port Ball Valve

Size Range 1/4" - 2" (DN08 - DN50)

Pressure Rating 1000 PSI


Materials Stainless Steel, Carbon Steel

End Connection Threaded

Service Application Water, Oil, Gas, Thermal Fluid, Chemicals and others

Certifications ISO 9001, PED 97/23/EC


Operation Manual or Actuated

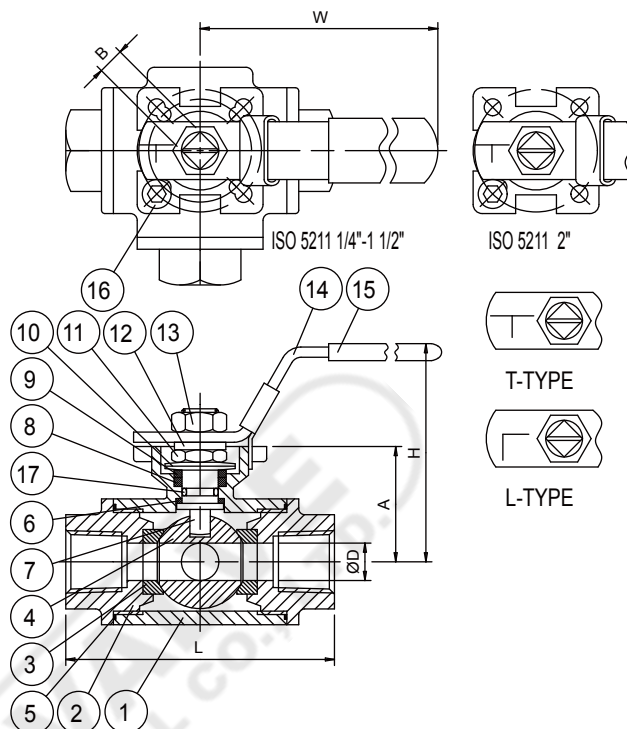

MATERIAL LIST:

ITEM	DESCRIPTION	STAINLESS STEEL	CARBON STEEL	Q'TY
1	BODY	ASTM A351 CF8M	ASTM A216 WCB	1
2	BODY CAP	ASTM A351 CF8M	ASTM A216 WCB	3
3	SEAT	PTFE	PTFE	4
4	BALL	ASTM A351 CF8M/316	ASTM A351 CF8/304	1
5	BODY GASKET	PTFE	PTFE	3
6	THRUST WASHER	PTFE	PTFE	1
7	STEM	ASTM A276 316	ASTM A276 304	1
8	STEM PACKING	PTFE	PTFE	1-2
9	GLAND	AISI 304	AISI 304	1
10	BELLEVILLE WASHER	AISI 304	AISI 304	2
11	GLAND NUT	AISI 304	AISI 304	1
12	SPRING WASHER	AISI 304	AISI 304	1
13	HANDLE	AISI 304	ZINC PLATED STEEL	1
14	SLEEVE	VINYL PLASTISOL	VINYL PLASTISOL	1
15	HANDLE NUT	AISI 304	AISI 304	1
16	STOP PIN	AISI 304	CARBON STEEL	1
17	STEM O-Ring	VITON	VITON	1

P-T RATINGS

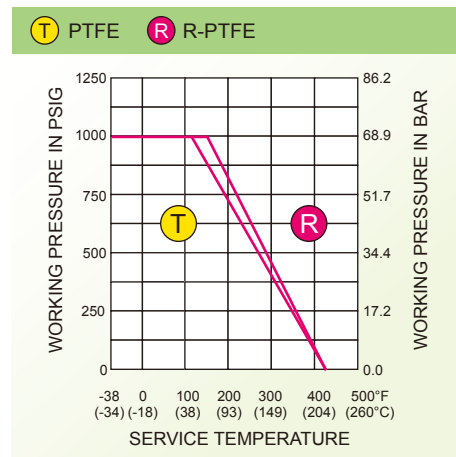

DIMENSIONS:

SIZE		ØD		L		H		W		A		B		ISO 5211	Weights KG
IN	DN	IN	MM	IN	MM	IN	MM	IN	MM	IN	MM	IN	MM		
1/4"	8	0.43	11.0	3.07	78	2.68	5.31	5.31	135	14.2	36	0.35	9	F03-F04	0.8
3/8"	10	0.47	12.5	3.07	78	2.68	5.31	5.31	135	14.2	36	0.35	9	F03-F04	0.8
1/2"	15	0.59	15.0	2.95	75	2.83	5.31	5.31	135	1.50	38	0.35	9	F03-F04	1.0
3/4"	20	0.79	20.0	3.39	86	2.91	5.31	5.31	135	1.61	41	0.35	9	F03-F04	1.2
1"	25	1.00	25.4	4.33	110	3.15	6.50	6.50	165	1.85	47	0.43	11	F04-F05	1.8
1 1/2"	40	1.50	38.0	5.39	137	4.17	7.68	7.68	195	2.68	68	0.55	14	F05-F07	3.6
2"	50	1.97	50.0	6.14	156	5.28	10.23	7.68	195	3.15	80	0.55	14	F07	7.0